



touch screen



USB 2.0



AUDIO



HDMI

VGA DVI

INDUSTRIAL GRADE
SUNLIGHT READABLE
10.1" MONITOR



XENARC
TECHNOLOGIES




- ▀ Heavy Duty aluminum casing
- ▀ 5 Wire Resistive Armored Touchscreen option
- ▀ VGA, HDMI, DVI, and AV Inputs
- ▀ 16x9 Aspect Ratio
- ▀ LED Backlight, Ambient Light Sensor
- ▀ High Performance Image and Video Signal Processor
- ▀ Vertical and Horizontal image flip
- ▀ Front buttons disabling capability
- ▀ Chip Monolithic Ceramic Capacitors for improved durability
- ▀ AV2 Autoswitching upon signal detection
- ▀ VESA 75mm Standard
- ▀ 26 Pin heavy-duty connector with connector locking
- ▀ Brightness - 1200 cd/m² Sunlight readable
- ▀ Anti-Reflective coating

Physical Resolution: 1280 x 800
 Supported Resolution: 640 x 480 - 1920 x 1080
 Brightness: 1200 cd/m²
 Contrast Ratio: 800:1
 Viewing Angle: 140° Horizontal, 120° Vertical
 Response Time (Tr/Tf): 10/15ms (Typ.)
 Operating Voltage: DC 9V ~ 36V
 Power Consumption: <20W
 Operating Temp: -4°F ~ 158°F
 Storage Temp: -22°F ~ 176°F
 Weight: 3.3lbs
 36 Month Warranty
 All measurements are in [mm]



INDUSTRIAL GRADE
 SUNLIGHT READABLE
10.1" MONITOR

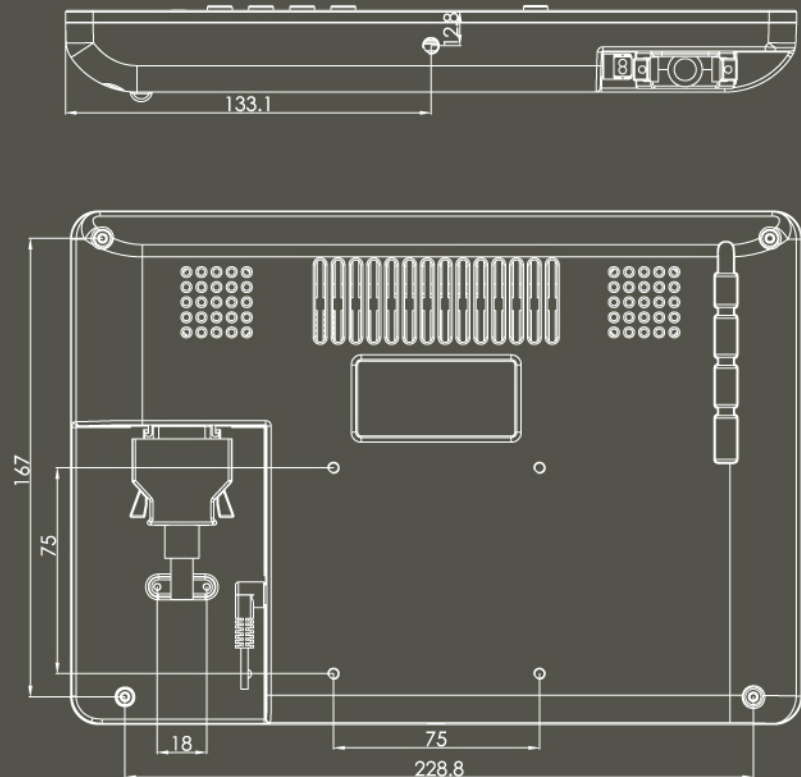

CERTIFICATIONS



RoHS

E 13

TEL: 949.380.8898 FAX: 949.380.0888
 EMAIL: SALES@XENARC.COM