




IP67 WATERPROOF
SUNLIGHT READABLE

12.1" MONITOR






XENARC
TECHNOLOGIES

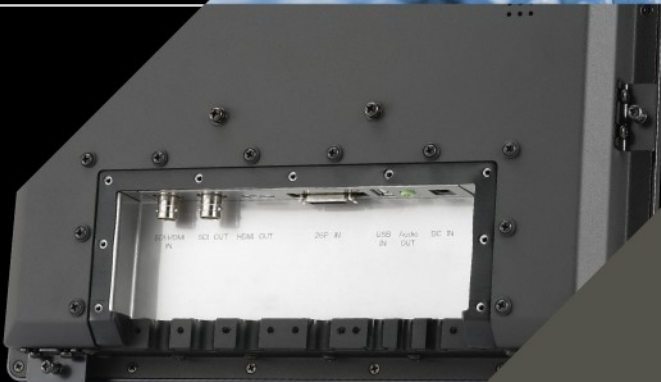

- ▶ IP67 Waterproof and Dust Proof Casing
- ▶ Projected Capacitive Touchscreen option – USB
- ▶ High Resolution Wide Viewing Angle IPS Display
- ▶ Waterproof Speakers
- ▶ VGA, HDMI, AV Inputs, Optional SDI or USB-C Input
- ▶ Optional HDMI output or SDI output
- ▶ 16x9 Aspect Ratio
- ▶ LED Backlight, Ambient Light Sensor
- ▶ High Performance Image and Video Signal Processor
- ▶ Vertical image flip
- ▶ Front buttons disabling capability
- ▶ Chip Monolithic Ceramic Capacitors for improved durability
- ▶ AV2 Auto Switching upon signal detection
- ▶ VESA 75mm Standard
- ▶ 26 Pin heavy-duty connector with connector locking
- ▶ Brightness – 1000 cd/m² Sunlight Readable
- ▶ Optical Bonding, Anti-Reflective and Anti-Fingerprint Coating

Physical Resolution: 1280 x 800
 Supported Resolution: 640 x 480 - 1920 x 1080
 Brightness: 1000 cd/m²
 Contrast Ratio: 100:1
 Viewing Angle: 178° Horizontal, 178° Vertical
 Response Time (Tr+Tf): 25ms (Typ.)
 Touch Screen Interface: USB port
 Operating Voltage: DC 9V ~ 36V
 Power Consumption: ≤ 30W
 Operating Temperature: -22°F ~ 185°F (-30°C ~ 85°C)
 Storage Temperature: -22°F ~ 185°F (-30°C ~ 85°C)
 Weight: 6.30lbs
 36 Month Warranty
 All measurements are in Inch and [mm]

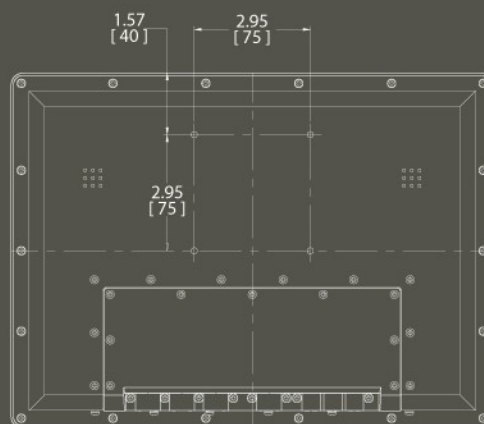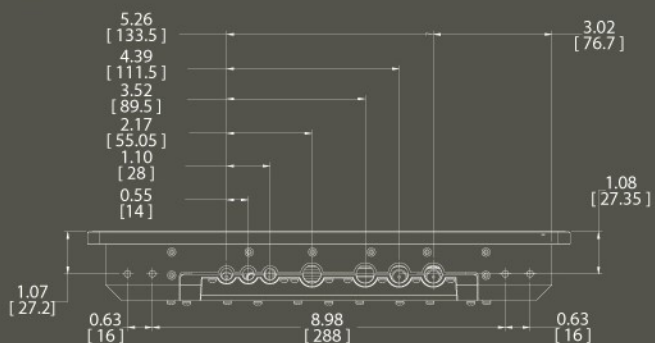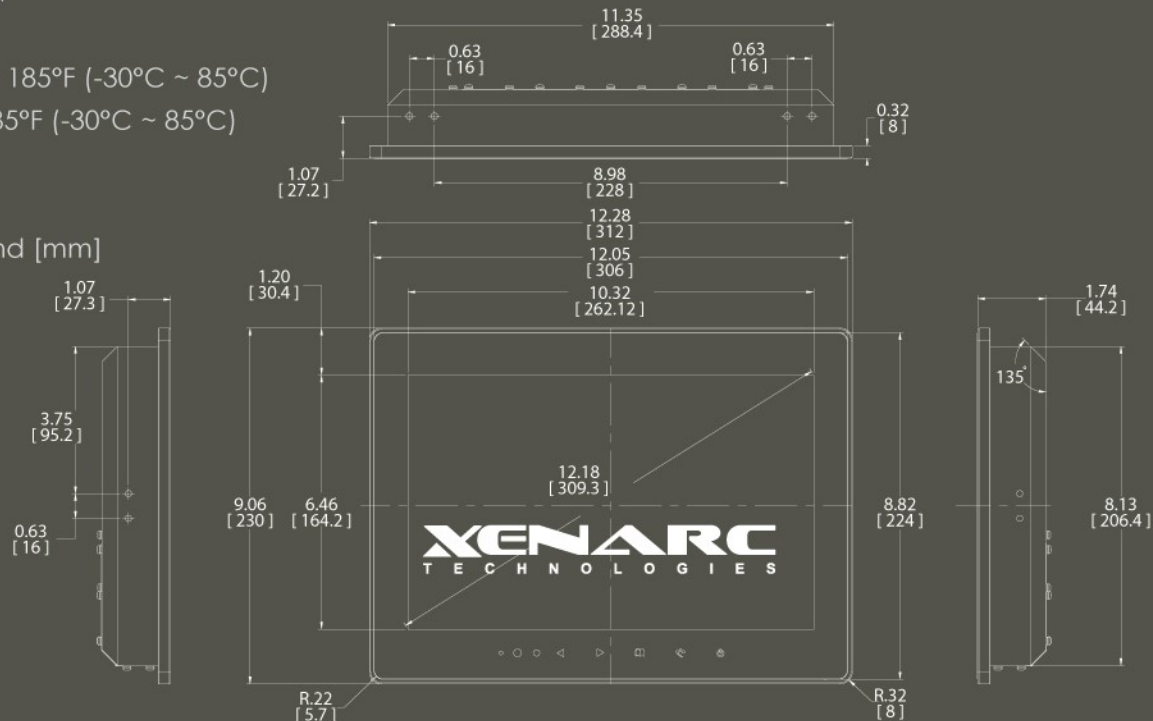

IP67 WATERPROOF
 SUNLIGHT READABLE
12.1" MONITOR

CERTIFICATIONS



RoHS

E 13

TEL: 949.380.8898 FAX: 949.380.0888
 EMAIL: SALES@XENARC.COM