



touch screen



USB 2.0



AUDIO



HDMI

VGA DVI

INDUSTRIAL GRADE SUNLIGHT READABLE 8" MONITOR




XENARC
TECHNOLOGIES




- ▶ Heavy Duty aluminum casing
- ▶ 5 Wire Resistive Armored Touchscreen option
- ▶ VGA, HDMI, DVI, and AV Inputs, 4x3 Aspect Ratio
- ▶ Adjustable LED Backlight for nighttime use
- ▶ High Performance image and video processor
- ▶ Vertical and Horizontal image flip
- ▶ Front buttons disabling capability
- ▶ Chip Monolithic Ceramic Capacitors for improved durability
- ▶ AV2 Autoswitching upon signal detection
- ▶ VESA 75mm Standard
- ▶ 26 Pin heavy-duty connector with connector locking
- ▶ Brightness - 1000 cd/m² sunlight readable
- ▶ Anti-Reflective and Anti-Fingerprint Coating

Physical Resolution: 800 x 600
 Supported Resolution: 640 x 480 - 1920 x 1080
 Brightness: 1000 cd/m²
 Contrast Ratio: 500:1
 Viewing Angle: 140° Horizontal, 120° Vertical
 Response Time (Tr/Tf): 10/15ms (Typ.)
 Operating Voltage: DC 9V ~ 36V
 Power Consumption: <14W
 Operating Temp: -4°F ~ 158°F
 Storage Temp: -22°F ~ 176°F
 Weight: 2.64lbs
 36 Month Warranty
 All measurements are in [mm]

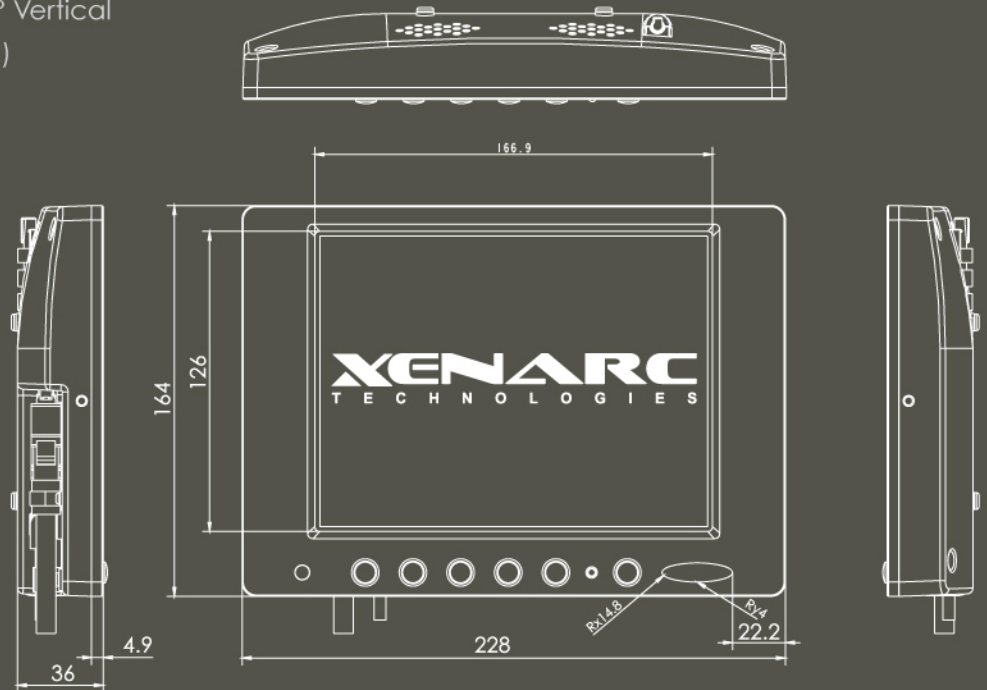

INDUSTRIAL GRADE
 SUNLIGHT READABLE
8" MONITOR

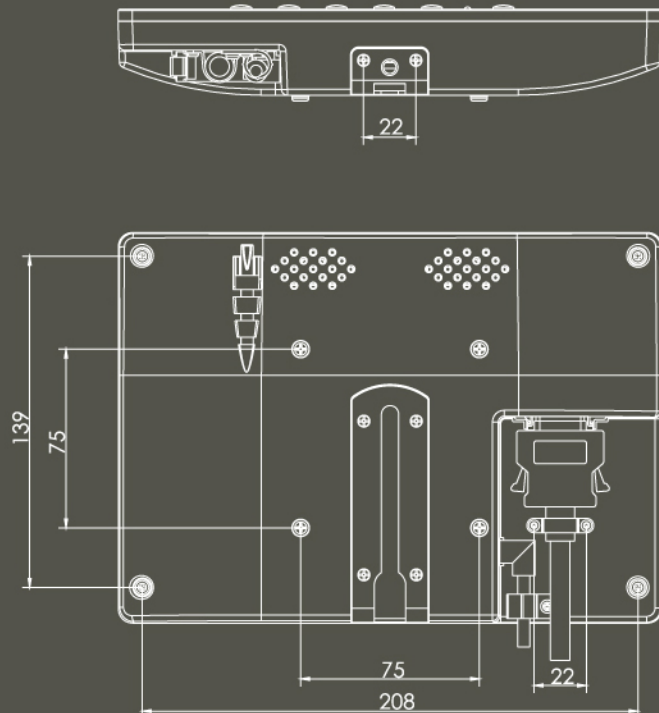

CERTIFICATIONS



RoHS

E 13

TEL: 949.380.8898 FAX: 949.380.0888
 EMAIL: SALES@XENARC.COM