



ALL PURPOSE 7" MONITOR



XENARC
TECHNOLOGIES



- ▶ 5 Wire Resistive and PCAP Touchscreen option - USB
- ▶ 16x9 Widescreen aspect ratio
- ▶ VGA, HDMI, DVI, and AV Inputs
- ▶ LED Backlight, Ambient Light Sensor
- ▶ Vertical and Horizontal image flip
- ▶ Front buttons disabling capability
- ▶ Chip Monolithic Ceramic Capacitors for improved durability
- ▶ High Performance image and video processor
- ▶ AV2 Auto Switching upon signal detection
- ▶ VESA 50mm mounting holes
- ▶ 26 Pin heavy-duty connector with connector locking
- ▶ Brightness - 600 cd/m²

SPECIFICATIONS

Physical Resolution: 1024 x 600

Supported Resolution: 640 x 480 – 1920 x 1080

Brightness: 600 cd/m²

Contrast Ratio: 700:1

Viewing Angle: 150° Horizontal, 145° Vertical

Operating Voltage: DC 10V ~ 35V

Power Consumption: <10W


Operating Temp: -4°F ~ 158°F

Storage Temp: -22°F ~ 176°F

Weight: 1.54lbs

36 Month Warranty

All measurements are in [mm]

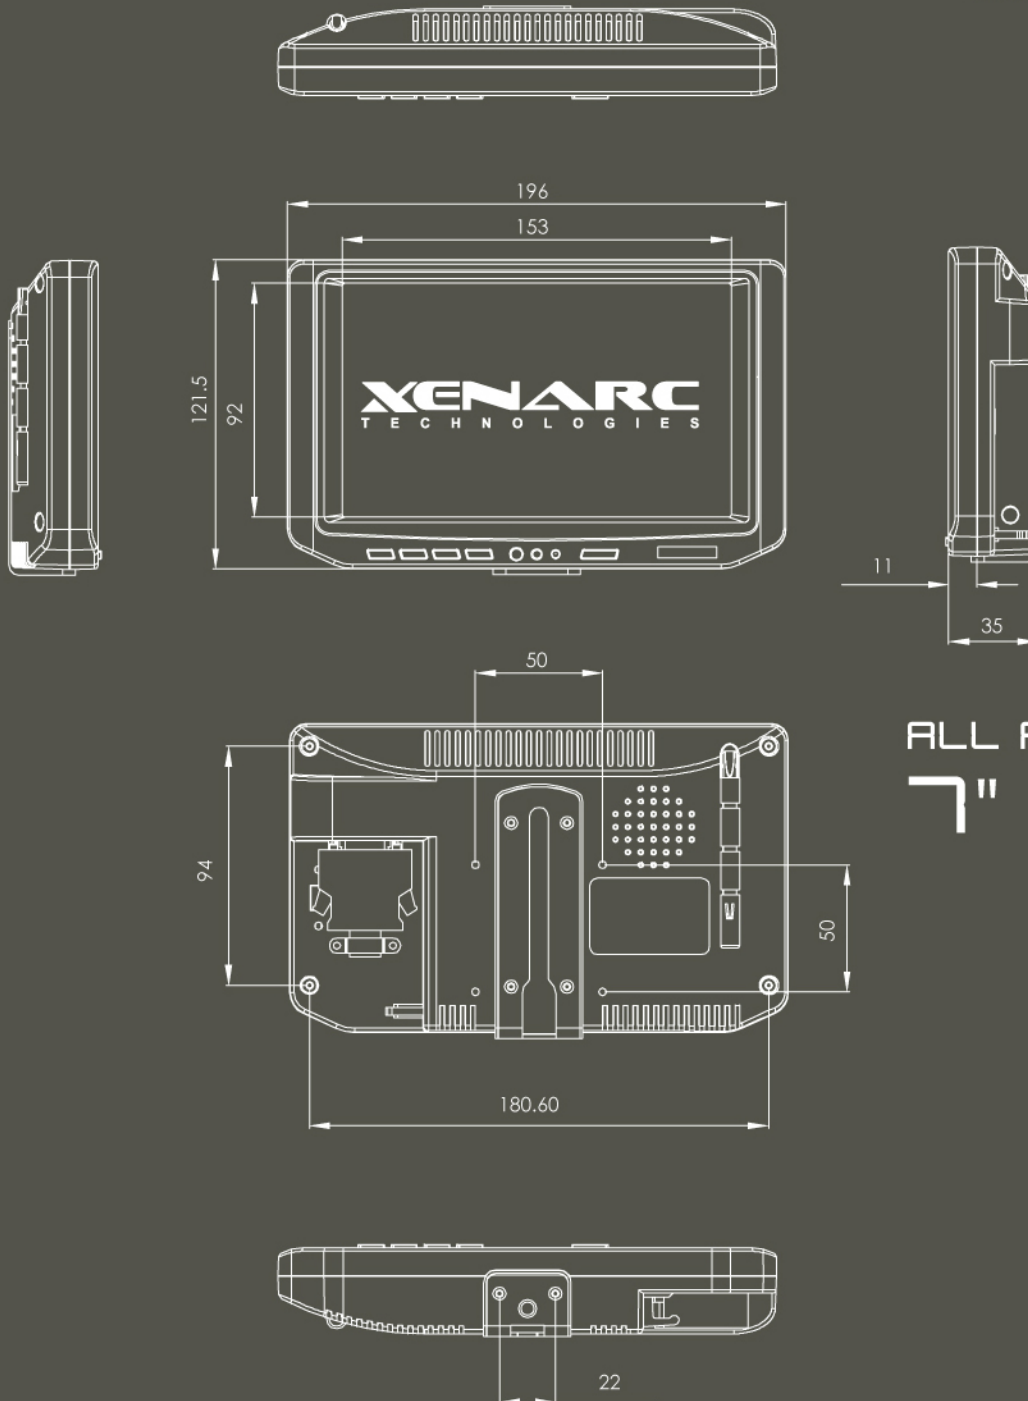

ALL PURPOSE
7" MONITOR

CERTIFICATIONS

FC CE

RoHS

E 13

TEL: 949.380.8898 FAX: 949.380.0888

EMAIL: SALES@XENARC.COM